

design production distribution



Innovation Timeline

2006

First Worldwide Drywall Sander with Suction effect

2007

VEZOS wins French International Prize

"Best Innovative Product of The Year"

2014

Innovative Multi Set Up Drywall Sander - 7 Meters Height

2015

New Generation Hydraulic Airless Sprayers with universal unique features:

Highest pressure, in its category 260 bar

First ever Upright Design & Compact Structure

VEZOS unique T.C.S. Technology

2016

VEZOS introduces the "Transform Concept" Transforming applications with smart accessories

2016

"Best Power To Weight Ratio Drywall Sander"

2016

Transform Concept R-LinePack" first worldwide airless spray to line striper transformation kit

2017

"Revolutionary Line Striping Range" unique features :

FlipDrive, double ride option - "Transform Concept"

Easy Gun Selector, featured control

Revolutionary Motion Control

On the Go, Pattern Selection

Foldable Chasse

Disk Lock Brake System

2017

First mid-range hydraulic airless paint sprayer

2017

"High Flow" Airless Texture Sprayer Range



Airless Paint / Texture Runner

- Runner Pro Hydraulic 260 bar
- R-LinePack Striping Kit

Line Striper Seat FlipDrive

• FlipDrive Double "Sit / Stand" Ride

Airless Paint / Texture DURA

- DURA-6 Standard / High-Flow
- DURA-8 Standard / High-Flow

Wall & Ceiling Sanders HS/ERGO

- Handysand Combo sander
- Handysand Basic sander
- ERGO Classic sander

Line Striper Range ProStripe

- ProStripe Hydraulic 200 Manual
- ProStripe Hydraulic 300 SP / Manual
- ProStripe Hydraulic 400 SP / AUTO

Pneumatic Airless Sprayers

- Z-FORCE
- Z-SPRAY

Hydraulic & Air Operated Pumps

Scarifier Machinery Pro Grind

- Pro Grind 120
- Pro Grind 250





RUNNER - Airless Paint & Texture Sprayers

Hydraulic Heavy Duty Airless Range



Large & heavy duty coating jobs



- 260 bar working pressure
- Hydraulic operation
- Built-in filter
- T.C.S cooling system
- Suction hose kit
- Industrial 6 ply tires
- Multiple users
- Large hydraulic oil ta
- Slow stoke pump
- **Delivery flow 6.4 12.0 l/m**
- Adjustable handle

RANSFORM YOUR AIRLESS







R-LINEPACK - Line Striping Kit

"Transformation Concept"- First airless striping kit

TRANSPORT YOUR AIRLESS



TRANSFORM YOUR AIRLESS

Cost Saving Ideas

Runner Airless + R-LinePack

Transform your airless sprayer into a hydraulic line striper, offering your clients a professional line striping job to their parking garage, or even line stripe local community roads.

VEZOS innovations allow contractors to advance in their business, without spending on an additional sprayer. Transform your airless, transform your business! Stripe parking lots, school playgrounds, malls, local roads ... etc.

All conversions & transformation take seconds, don't need any tools and most important save time & money!



Transform in seconds

Texture - Paint - Line Striping

Connect the Runner Airless by rolling the unit to the R-LinePack, the accessory will click into place. Secure with the foot break.

Attach the steering / spraying control on the main units handle. Adapt the airless spray gun in the holder.

The R-LinePack has transformed the Runner into a hydraulic line striping machine, saving its user the cost of an additional unit.

NO TOOLS REQUIERED







RUNNER - Airless Paint & Texture Sprayers

RUNNER hydraulic airless texture & paint sprayers, cover a wide range of coating materials, ideal for medium to large contractors that are looking to get the most out of their sprayer. Proven hydraulic operation & VEZOS hard chromed slow stoke pump, combined with cost effective accessories, is the best choice to get the job done.

Hydraulic Sprayer F	Runner PRO 7
Part number	23.1003812.G
Runner edition	Pro 7
Max pressure	260 bar
Max delivery	7.5 lit/min
Power	5.5 hp
Motor	HONDA GX200
Pump	Hard chromed
Hydraulic reservoir	5.0 liter
Max tip size	0.051
Dimensions	73x61x74cm
Power convert	Convertible
Paint hose 3/8"	15 meter
Paint hose 1/4"	1 meter
Airless spray gun	1 piece
Gun guard	1 piece
Gun tip	1 piece
Power convert	Available kit





Hydraulic Sprayer F	Runner PRO 7
Part number	23.1003812.E
Runner edition	Pro 7
Max pressure	260 bar
Max delivery	6.4 lit/min
Power	4 hp
Motor	Electric 230 Volt
Pump	Hard chromed
Hydraulic reservoir	5.0 liter
Max tip size	0.049
Dimensions	73x61x74cm
Power convert	Convertible
Paint hose 3/8"	15 meter
Paint hose 1/4"	1 meter
Airless spray gun	1 piece
Gun guard	1 piece
Gun tip	1 piece
Power convert	Available kit



Hydraulic Sprayer R	unner PRO 12
Part number	23.1003822.E
Runner edition	Pro 12
Max pressure	260 bar
Max delivery	10 lit/min
Power	7.5 hp
Motor	Electric 380 Volt
Pump	Hard chromed
Hydraulic reservoir	5.0 liter
Max tip size	0.055
Dimensions	79x61x74cm
Power convert	Convertible
Paint hose 3/8"	15 meter
Paint hose 1/4"	1 meter
Airless spray gun	1 piece
Gun guard	1 piece
Gun tip	1 piece
Power convert	Available kit





Honda GX engines



Powerful 4hp motors



Hydraulic Sprayer F	Runner PRO 12
Part number	23.1003822.G
Runner edition	Pro 12
Max pressure	260 bar
Max delivery	12 lit/min
Power	8.5 hp
Motor	HONDA GX270
Pump	Hard chromed
Hydraulic reservoir	5.0 liter
Max tip size	0.057
Dimensions	73x61x74cm
Power convert	Convertible
Paint hose 3/8"	15 meter
Paint hose 1/4"	1 meter
Airless spray gun	1 piece
Gun guard	1 piece
Gun tip	1 piece
Power convert	Available kit



R-LINEPACK - Line Striping Kit / Paint Spray



Hydraulic Airless Sprayer I	RP7 With Line Striping Kit
Part number	23.7003812
Max pressure	260 bar
Max delivery	7.5 l/min
Power	5.5 hp
Motor	HONDA GX200
Pump	Hard Chromed
Hydraulic reservoir	5.0 liter
Max tip size	0.051
Dimensions	73x61x74 cm + 120x50x35
Power convert	Convertible
Paint hose 3/8"	Available
Paint hose 1/4"	15 meter
Airless spray gun	1 piece
Gun guard	1 piece
Gun tip	1 piece
Power convert	Available kit





R-LinePack Striping Kit Complete Edit.

Part number	23.7001001	
Dimensions	120x50x35cm	
R-LinePack cart	1 piece	
Steering-Spray control	1 piece	
Paint suction kit	1 piece	
Paint hose 1/4"	15 meter	
Pointer kit long	1 piece	
Gun guard	1 piece	
Gun tip	2 pieces	
Power convert	Available kit	



TRANSFORM YOUR AIRLESS

Part number	23.7002001
Dimensions	120x50x35cm
R-LinePack cart	1 piece
Steering-Spray control	1 piece
Paint suction kit	Available
Paint hose 1/4"	Available
Pointer kit long	Available
Gun guard	Available
Gun tip	Available
Power convert	Available kit





DURA - Texture & Paint Sprayers

High-Flow & Standard Series





- 177/230 bar w. pressure
 - High Flow series
 - Standard series
- Hydraulic operation
- Hard chromed pump
- Built-in filter (optional)
- Upright structure
- T.C.S cooling system
- Direct immerse pump
- Suction hose kit
- Heavy duty cart
- Industrial 4 ply tires
- Adjustable pressure
- Multiple users
- Large hydraulic oil tank
- Slow stoke pump
- Wide material inlets
- Delivery flow 5.9 10.1 l/m
- Easy transportation
- . Adjustable handle





DURA Standard & High Flow Airless Series

"Hydraulic power in a mid-range airless range"



DURA range of airless spraying equipment, matches up reliability & productivity for medium to large size contracting projects. **DURA Texture Sprayers** are equipped with VEZOS - **Black Pump Series** - a hydraulic slow stroke pump with proven excellence over the years, eliminating classic electric sprayers disadvantages that cause downtimes while on the job.

DURA Texture Sprayers, are ideal for contractors that apply interior & exterior coatings and airless paints on a daily basis. Expecting only the best out of a VEZOS hydraulic airless sprayer, **DURA Standard** & **DURA High-Flow** series cover a full range of material flow enabling professional contractors to choose the correct unit for their daily jobs.



Standard Series

DURA hydraulic mid-range airless

DURA standard edition, is a step up for contractors taking on medium to large contracting jobs. Hydraulically operated, DURA STD texture sprayers offer professional contractors a heavy duty sprayer that replaces the downsides of common electric piston units, enabling them to match quality and productivity to an airless sprayer that meets their own requirements.

DURA Standard is the ideal sprayer for internal and external spraying applications, with zero emission and a high productivity rate. VEZOS medium size DURA sprayers reduce downtime and expensive repairs with a heavy duty constructed unit designed especially for the rough environment it is intended for.





High-Flow Series

DURA extra flow airless

DURA High-Flow texture & paint airless sprays cover the needs of those that ask for more out of their equipment. No settlements, when it comes down to a professional hydraulic pump, VEZOS TCS technology, upright design & hard chromed hydraulic piston pump are only a few of the features that make this edition a top of the range choice.

Equipped with a powerful 4hp motor and an outstanding 10.1 I/min material flow, the DURA **High-Flow** is ideal for contractors that take on continuous high production coating jobs, with simultaneously users, increasing their businesses profit per square meter.



DURA - Mid-Range Paint & Texture Sprayers

VEZOS hydraulic airless sprayers, are ideal for high volume heavy coating and maintenance jobs, offering an outstanding 177 to 260 bar working pressure, simulations users operation, a wide variety of material use and the markets well know hard chromed hydraulic pump, only offered on a VEZOS sprayer.



Paint & Texture Spraye	er DURA 6 Standard
Part Number	24.1105010
Max Working Pressure	230 bar/3300 psi
Max Flow Delivery	5.9 lit/min
Power	3 hp
Motor	230 volt electric
Pump	Hard chromed
Cart	Heavy duty
Hydraulic Reservoir	5 liters
Weight	86 kg
Dimensions	65*61*74.5cm
Dura Complete	24.1105010
Dura Complete SK	24.1105210
Dura Bare*	-

Paint & Texture Spraye	er DURA 8 Standard		
Part Number	24.1105014		
Max Working Pressure	230 bar/3300 psi		
Max Flow Delivery	7.5 lit/min		
Power	4 hp		
Motor	230 volt electric		
Pump	Hard chromed		
Cart	Heavy duty		
Hydraulic Reservoir	5 liters		
Weight	92 kg		
Dimensions	72.5*61*74.5cm		
Dura Complete	24.1105014		
Dura Complete SK	24.1105211		
Dura Bare*	-		







Paint & Texture Spraye	er DURA 6 High Flow		
Part Number	24.1105012		
Max Working Pressure	177 bar/2600 psi		
Max Flow Delivery	7.6 lit/min		
Power	3 hp		
Motor	230 volt electric		
Pump	Hard chromed		
Cart	Heavy duty		
Hydraulic Reservoir	5 liters		
Weight	86 - 83 kg (bare)		
Dimensions	65*61*74.5cm		
Dura Complete	24.1105012		
Dura Complete SK	_		
Dura Bare*	24.1105013		
Dura Filter Kit	24.1205015		

Part Number	24.1105016
Max Working Pressure	177 bar/2600 psi
Max Flow Delivery	10.1 lit/min
Power	4 hp
Motor	230 volt electric
Pump	Hard chromed
Cart	Heavy duty
Hydraulic Reservoir	5 liters
Weight	92 - 89 kg (bare)
Dimensions	72.5*61*74.5cm
Dura Complete	24.1105016
Dura Complete SK	-
Dura Bare*	24.1105017
Dura Filter Kit	24.1205015





Drywall Sanders - Wall & Ceiling Applications



- ⇒ Multi Set Up
- ⇒ Auto Regulated Suction
- ⇒ Extreme Sanding Height

- ⇒ Instant Length Boost
- ⇒ Auto Regulated Suction
- ⇒ Dustless Sanding







- Auto Regulated Suction
- 7 meters working height
- Transform concept
- 750 watt powerful motor
- Retractable extensions
- Multi set up design
- Original suction effect
- Dustless sanding
- Award wining products
- 97cm compact version
- Aluminum body
- Soft grips
- · Wide range of abrasives
- Rotating head
- Adjustable suction
- Vacuum connectors
- Easy setup
- Best weight/power ratio

TRANSFORM YOUR SANDER







Drywall Sanders - Wall & Ceiling Applications Self-Gripping & Classic Sanding







Handysand drywall series

AUTO regulated suction - Gripping effect

Handysand Combo, combines VEZOS quality and innovation in one tool. Avoid scaffolding when sanding high vertical walls that are time and cost consuming. Add main extensions and take advantage of the ARS Tech that will automatically regulate the suction force and allow the Handysand to grip to the surface eliminating the weight of the tool and offering an amazing 7 meters working height.

Handysand Basic, a one piece sander, with an optional hidden away retractable extensions, is ideal for contractors that simply want to plug in and sand. Easy operation, low service maintenance and of course VEZOS gripping effect.

VEZOS drywall sanders, are manufactured out of aluminum, fully welded & connect to all vacuum brands - keeping the cost low for the end-user.

Don't lift the weight of your tool!!







ERGO drywall series

Double length classic sanding procedure


Ergo Classic wall sander is a challenge to the sanding industry. Its low weight compared to its strong powered motor offer users a unique sanding experience. Perfectly balance out, with a hidden away telescopic extension, the Ergo Classic sander transforms in length from a compact version sander of 130cm to a 174cm!

Ergo drywall sander connects to all vacuum collectors.





Drywall Sanders - Wall & Ceiling Applications

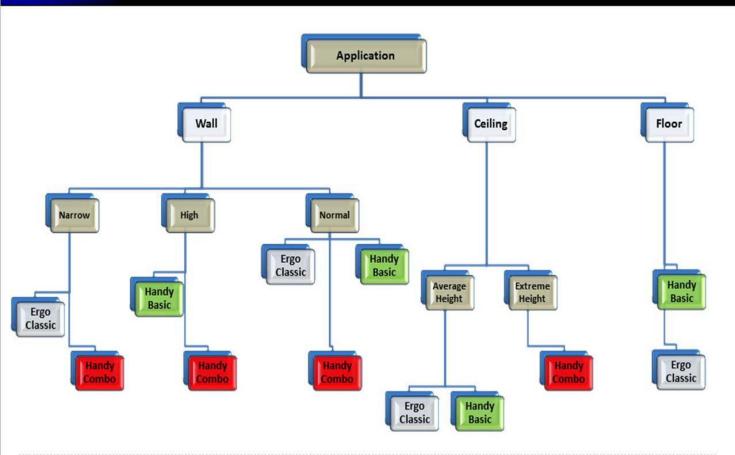

Handysand Combo S	Self Gripping Wa	ll And Ceiling Sa	nder		
Part number	23.5111101	23.5011201	23.5011200	23.5011300	23.5011101
Handysand edition	Combo XXL	Combo Smart	Combo Bare	Combo Smart L	Combo XL
Sander line	Combo line	Combo line	Combo line	Combo line	Combo line
Sanding type	A.R.S self grip	A.R.S self grip	A.R.S self grip	A.R.S self grip	A.R.S self grip
Rated power	750 watt	750 watt	750 watt	750 watt	750 watt
Voltage	220/110 volt	220/110 volt	220/110 volt	220/110 volt	220/110 volt
Speed r.p.m	550-1350	550-1350	550-1350	550-1350	550-1350
Drive cable	8mm	8mm	8mm	8mm	8mm
Power cable	5m	5m	5m	5m	5m
Weight no extension	4.2 kg	4.2 kg	4.2 kg	4.2 kg	4.2 kg
Weight 2 extension	5.7 kg	4.9 kg	4.9 kg	4.9 kg	5.7 kg
Overall length	272 cm	207 cm	162 cm	227 cm	272 cm
Working height	392 cm	327 cm	282 cm	347 cm	392 cm









DRYWALL surface preparation sanders

f Gripping Wall	And Ceiling Sand	der	
23.6001102	23.6001104	23.6001103	23.6011001
Basic XXL	Basic Transport	Basic Smart	Basic Bare
Basic line	Basic line	Basic line	Basic line
A.R.S self grip	A.R.S self grip	A.R.S self grip	A.R.S self grip
750 watt	750 watt	750 watt	750 watt
220/110 volt	220/110 volt	220/110 volt	220/110 volt
550-1350	550-1350	550-1350	550-1350
8mm	8mm	8mm	8mm
5m	5m	5m	5m
4.8 kg	4.8 kg	4.8 kg	4.8 kg
208 cm	163 cm	208 cm	163 cm
328 cm	283 cm	328 cm	283 cm
	23.6001102 Basic XXL Basic line A.R.S self grip 750 watt 220/110 volt 550-1350 8mm 5m 4.8 kg 208 cm	23.6001102 23.6001104 Basic XXL Basic Transport Basic line Basic line A.R.S self grip A.R.S self grip 750 watt 750 watt 220/110 volt 220/110 volt 550-1350 550-1350 8mm 8mm 5m 5m 4.8 kg 4.8 kg 208 cm 163 cm	Basic XXL Basic Transport Basic Smart Basic line Basic line Basic line A.R.S self grip A.R.S self grip A.R.S self grip 750 watt 750 watt 750 watt 220/110 volt 220/110 volt 220/110 volt 550-1350 550-1350 550-1350 8mm 8mm 8mm 5m 5m 5m 4.8 kg 4.8 kg 4.8 kg 208 cm 163 cm 208 cm

ERGO Double length di	rywall sander			
Part number	23.1007201	23.1007201	23.1006999	23.1007200
Ergo classic edition	Ergo XXL	Ergo XXL	Ergo Smart	Ergo Basic
Sander line	Classic line	Classic line	Classic line	Classic line
Sanding type	Classic	Classic	Classic	Classic
Rated power	750 watt	750 watt	750 watt	750 watt
Voltage	220/110 volt	220/110 volt	220/110 volt	220/110 volt
Speed r.p.m	550-1350	550-1350	550-1350	550-1350
Drive cable	8mm	8mm	8mm	8mm
Power cable	5m	5m	5m	5m
Weight	4.5 kg	4.5 kg	4.5 kg	4.15 kg
Overall length	130 - 174 cm	130 - 174 cm	130 - 174 cm	130 cm
Working height	250 cm	250 cm	294 cm	250 cm



PROSTRIPE - Hydraulic line stripers



Self-Propelled & Walk Behind



- 177/230 bar w. pressure
- High Flow series
- Standard series
- Hydraulic operation
- Hard chromed pump
- Built-in filter (optional)
- Upright structure
- T.C.S cooling system
- Direct immerse pump
- Suction hose kit
- Heavy duty cart
- · Industrial 4 ply tires
- Adjustable pressure
- Multiple users
- · Large hydraulic oil tank
- Slow stoke pump
- · Wide material inlets
- Delivery flow 5.9 10.1 l/m
- Easy transportation
- Adjustable handle





PROSTRIPE - Hydraulic line stripers










Double method ride seat

ProStripe self propelled models

Connect the FlipDrive to all Self-Propelled VEZOS ProStripe models, on the spot - no tool, flip system for overall visibility on the job. Hidden non-slip storage space for tools. Extra storage space for warning cones, gas or paint tank. No complex pedals for steering the FlipDrive, simply use the ProStripe steering handles.

Enjoy the ride !!!



Increased visibility

Carefully designed, the ProStripe Self-Propelled striper with FlipDrive Seat, increases visibility even when striping with the bead hopper attached.

Choose between a sitting or standing position increasing the visibility of the road.

VEZOS ProStripe offers a panoramic view of the road & eliminates the blind areas, even in sitting position with the bead hopper on!










PROSTRIPE - Hydraulic line stripers







Foldable Chassis

VEZOS Unique Features

MAKE IT FIT EVERYWHERE
Pass with ease the ProStripe through any
standard doorway, store it in your business,
garage or warehouse without taking up the entire
space and finally fit the ProStripe in any small city
van or even Station Wagon that you may own,
without having to bring it to parts, due to its
foldable design. No tools needed to fold .




Pallet Concept

VEZOS Unique Features

VEZOS designs are cost saving on the job, but before the units arrive to their final destination, you the end-user, they are transported world-wide. Now you may think that this fact does not interest or concern you, well this is were the whole misconception is... The more space a product takes up, the higher the transport cost, therefor increase in your purchasing price! This is a fact that VEZOS takes very seriously and hopes to achieve the best value/product equation possible. How? By thinking out of the box, by smart innovative solutions.

VEZOS ProStripe range all fit on a single standard

VEZOS ProStripe range all fit on a single standard European pallet 120cm x 80cm!



Industry's Unique Features



vezos.co.uk

Vibrated Assisted Bead Hopper 21 It

T.C.S - Tunnel Cooling System

Disk Lock Hand Brake



PROSTRIPE - Hydraulic line stripers





Hydraulic Line Striper 2	OO BASIC	
Part number	23.9007410	23.9007100
ProStripe edition	PS 200 1 GUN	PS 200 1 GUN
ProStripe category	Basic	Standard
Max working pressure	240 bar	240 bar
Max flow	6.5 l/min	6.5 I/min
Motor power HONDA	4.8 hp net*	4.8 hp net*
in accordance SAE J1349	5.5 gross	5.5 gross
Paint Gun -1	1 piece	1 piece
Paint Gun -2	Optional	Optional
Foldable handle	Included	Included
Pointer 55cm	Accessory	Accessory
Bead Dispenser	Accessory	Accessory

Hydraulic Line Striper 300			
Part number	23.9008100	23.9008110	23.9008130
ProStripe edition	PS 300 1 GUN	PS 300 SP 1 GUN	PS 300 SP 1 GUN
ProStripe category	Standard	Self-propelled	Auto i Self - Propelled
Max working pressure	240 bar	240 bar	240 bar
Max flow	8.5 I/min	8.5 l/min	8.5 I/min
Motor power HONDA	5.8 hp net*	8.4 hp net*	8.4 hp net*
in accordance SAE J1349	6.5 gross	9.0 gross	9.0 gross
Paint Gun -1	1 piece	1 piece	1 piece
Paint Gun -2	Optional	Optional	Optional
Adjustable handle	Included	Included	Included
Pointer 55cm	Accessory	Accessory	Accessory
Bead Dispenser	Accessory	Accessory	Accessory
Paint hopper 60lt	Accessory	Accessory	Accessory
FlipDrive seat	n/a	Accessory	Accessory





line striping innovation

Hydraulic Line Striper 400			
Part number	23.9008140	23.9008150	23.9008160
ProStripe edition	PS 400 SP 1 GUN	PS 400 SP AUTO 1 GUN	PS 400 SP AUTO TWIN 1 GUN
ProStripe category	Self - Propelled	Auto i Self - Propelled	Auto i Self - Propelled
Max working pressure	240 bar	240 bar	240 bar
Max flow	12.0 l/min	12.0 l/min	12.0 l/min
Motor power HONDA	11.7 hp net*	11.7 hp net*	11.7 hp net*
in accordance SAE J1349	13.0 gross	13.0 gross	13.0 gross
Paint Gun -1	1 piece	1 piece	1 piece
Paint Gun -2	Optional	Optional	1 piece
Paint Gun - 3			Optional
Adjustable handle	Included	Included	Included
Pointer 55cm	Accessory	Accessory	Included
Bead Dispenser	Accessory	Accessory	Accessory
Paint hopper 60lt	Accessory	Accessory	Accessory
FlipDrive seat	Accessory	Accessory	Accessory





Z-PNEUMATIC Airless Pumps

Marine & Industrial Solutions



Marine & Ship Building




- Silent operation air motor
- Anti-freeze design
- Built-in filter
- Heavy duty car
- Pressure adjustment
- Slow stroke pump 140mn
- Card chrome pump
- Removable suction hase
- Large industrial wheels
- Lift/secure hool
- Protective guard
- Secure grips



V

Z-PNEUMATIC AIRLESS PUMPS

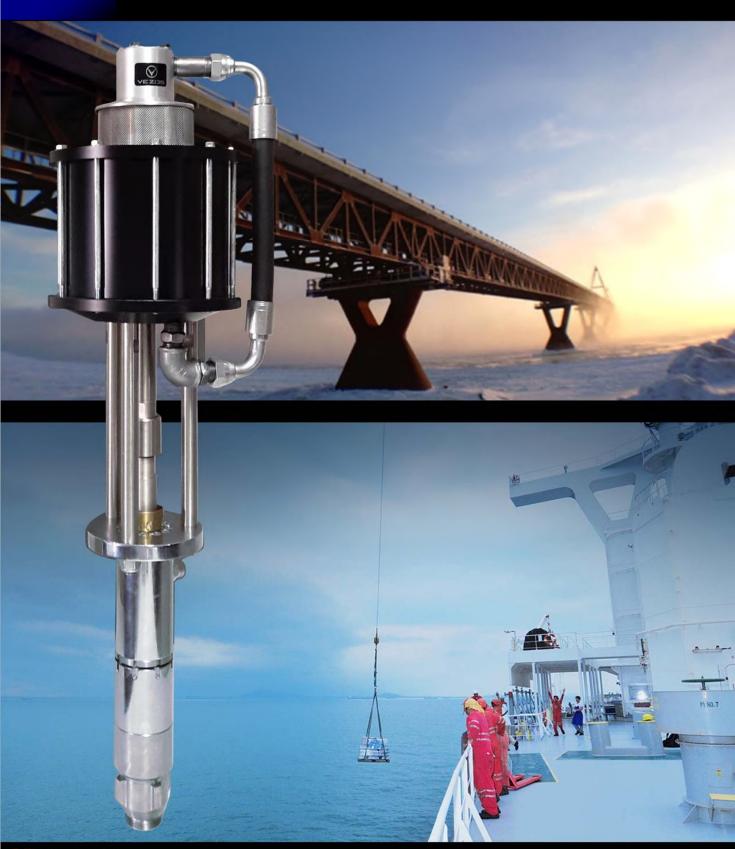

Z-FORCE PNEUMATIC PUMPS

FX pump technology

VEZOS Z-FORCE air operated pumps, cover a wide range of construction & maintenance applications. With a heavy duty structured cart, hard chromed extra long slow stroke pump & silent air motor operation, the Z-FORCE range proves that a VEZOS pump is the best solution to any industry.

Z-FORCE pumps are also available as a wall mounted set-up, including the industrial painting zone in its portfolio of clients. Removable suction hose, quick release system, no tools required is a standard feature on all models



Z-SPRAY

Easy transportation

Z-Spray airless air-operated pumps have a compact design, enabling easy transportation & storage. Ideal for roofing insulations, marine industry & protective corrosion applications. Equipped with VEZOS FX hard chromed pump, with an easy maintenance & service system.

Ratio:

30:1 / 50:1 / 68:1





Z-FORCE Airless air-assisted pumps

Pneumatic Pump Z-FOR	CE 40:1
Part Number	23.1003083
Air operated pump	FX 40
Motor size	4600
Fluid pressure ratio	40:1
Max. output pressure	285bar /28.5 MPa
Max. air input pressure	7 bar / 0.7 MPa
Fluid flow (@60cpm)	13.8 lit/min
Stroke Length	140mm
Displacement Pump	230сс
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP
Dimensions (L*W*H)	80*71.5*118cm
Weight	91 Kg



Pneumatic Pump Z-FOR	RCE 80:1
Part Number	23.1003084
Air operated pump	FX 80
Motor size	8900
Fluid pressure ratio	80:1
Max. output pressure	500bar /50 MPa
Max. air input pressure	6.5 bar / 0.65 MPa
Fluid flow (@60cpm)	13.8 lit/min
Stroke Length	140mm
Displacement Pump	230cc
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP
Dimensions (L*W*H)	80*71.5*118cm
Weight	98 Kg







Z-PNEUMATIC

high pressure pneumatic airless





Silent Operation Air-Motor / Anti-Freeze Design

Oiler & Oil Adjustment

Tool / Bucket Handle – Grip

Built-in Filter

Heavy Duty Drain Valve

Large Industrial Wheels

Lift / Secure Handles



Removable Suction Hose (Quick Release System)



Z-SPRAY Airless air-assisted pumps

Pneumatic Pump Z-SPR	AY 30:1
Part Number	23.1002835
Air operated pump	FX 30
Motor size	1000
Fluid pressure ratio	30:1
Max. output pressure	210bar /21.0 MPa
Max. air input pressure	7 bar / 0.7 MPa
Fluid flow (@120cpm)	8lit/min
Stroke Length	70mm
Displacement Pump	67cc
Pump fluid inlet	1 1/2" BSP
Dimensions (L*W*H)	65*61*96cm
Weight	46 Kg




Pneumatic Pump Z-SPR	AY 50:1
Part Number	23.1002836
Air operated pump	FX 50
Motor size	1700
Fluid pressure ratio	50:1
Max. output pressure	343bar /34.3 MPa
Max. air input pressure	7 bar / 0.7 MPa
Fluid flow (@120cpm)	8lit/min
Stroke Length	70mm
Displacement Pump	67cc
Pump fluid inlet	1 1/2" BSP
Dimensions (L*W*H)	65*61*96cm
Weight	59 Kg

Pneumatic Pump Z-SPR	AY 68:1
Part Number	23.1002837
Air operated pump	FX 68
Motor size	2300
Fluid pressure ratio	68:1
Max. output pressure	476bar /47.6 MPa
Max. air input pressure	7 bar / 0.7 MPa
Fluid flow (@120cpm)	8lit/min
Stroke Length	70mm
Displacement Pump	67cc
Pump fluid inlet	1 1/2" BSP
Dimensions (L*W*H)	65*61*96cm
Weight	65 Kg







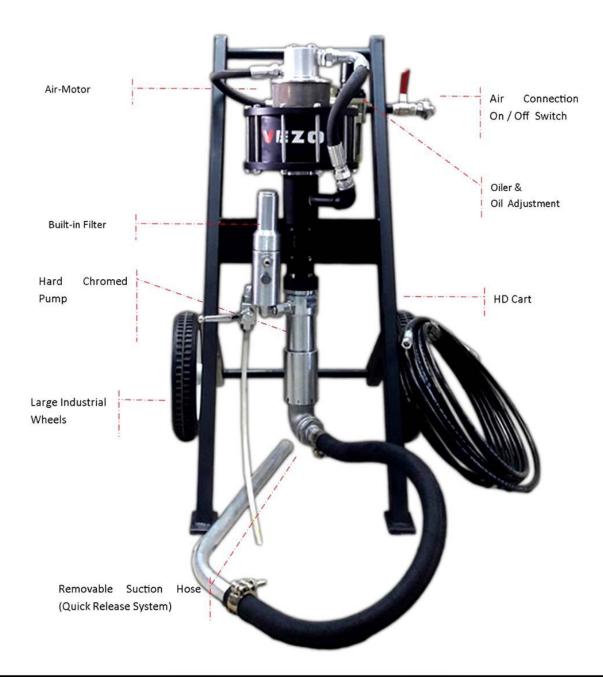


FX Air operated pumps

FX-PUMPS

air fluid pumps

FX pumps are designed to work in harsh conditions, with working pressure up to 500 bar / 50 MPa. Simple design with large air passages, reducing any icing effect and with an easy service & maintenance systems. Ideal for heavy materials and high production rates.

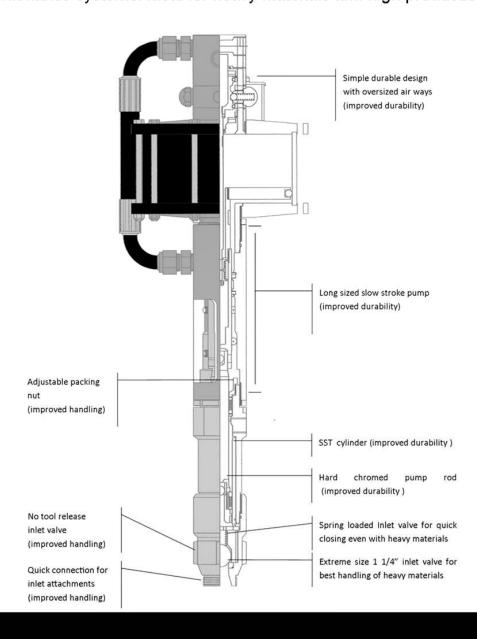





Air operated pump FX 68	
Part number	98.1005421
Motor size	2300
Fluid pressure ratio	68:1
Max. fluid output pressure	476 bar/ 47.6 MPa
Max. air input pressure	7 bar / 0.7 MPa
Fluid flow (@120cpm)	8 lit / min
Stroke Length	70 mm
Displacement Pump	67 cc
Hydraulic oil inlet	UNF 3/4 - 16 JIC 37
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP

Air operated pump FX 40	
Part number	98.1005422
Motor size	4600
Fluid pressure ratio	40:1
Max. fluid output pressure	285 bar/ 28.5 MPa
Max. air input pressure	7 bar / 0.7 MPa
Fluid flow (@60cpm)	13.8 lit / min
Stroke Length	140 mm
Displacement Pump	230 сс
Hydraulic oil inlet	UNF 3/4 - 16 JIC 37
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP


Air operated pump FX 80	
Part number	98.1005423
Motor size	8900
Fluid pressure ratio	80:1
Max. fluid output pressure	500 bar/ 50 MPa
Max. air input pressure	6.5 bar / 0.65 MPa
Fluid flow (@60cpm)	13.8 lit / min
Stroke Length	140 mm
Displacement Pump	230 сс
Hydraulic oil inlet	UNF 3/4 - 16 JIC 37
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP





HYDREX - Fluid Transfer Pumps

Hydrex robust hydraulic pumps have a heavy duty design, ensuring long working life. Hydrex pumps have a large stroke design for increased durability and higher suction power. Ideal for high viscosity materials and long operation hours.

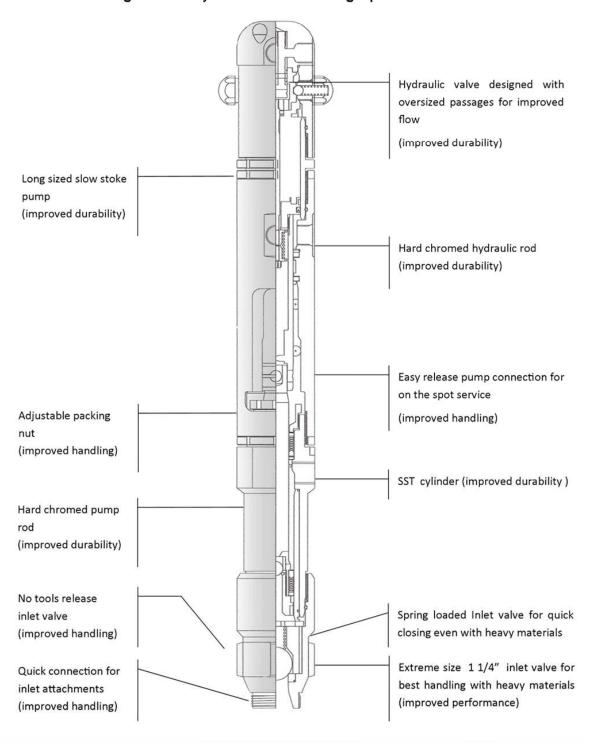

High Performance - Pumping Excellence





Part Number	97.1005401
Fluid pressure ratio	1,85:1
Max. fluid output pressure	260 bar/26 MPa
Max. hydraulic input pres- sure	140 bar/ 14 MPa
Oil flow (@60cpm)	7.4 lit /min
Fluid flow (@60cpm)	4 lit / min
Stroke Length	70 mm
Displacement Pump	67 cc
Hydraulic oil inlet	UNF 3/4 - 16 JIC 37
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP

Hydraulic Fluid Pump Hy	drex 230cc
Part Number	97.1005501
Fluid pressure ratio	1,1:1
Max. fluid output pressure	155 bar/15.5 MPa
Max. hydraulic input pres- sure	140 bar/ 14 MPa
Oil flow (@60cpm)	15.2 lit /min
Fluid flow (@60cpm)	13.8 lit / min
Stroke Length	140 mm
Displacement Pump	230 сс
Hydraulic oil inlet	UNF 3/4 - 16 JIC 37
Pump fluid inlet	1 1/2" BSP
Pump fluid outlet	1/2 BSP





PROGRIND Surface Preparation-Deck Scarifiers








VEZOS deck scarifiers are the best choice due to their tough construction, high productivity & proven technology in the marine industry. The ProGrind head cutter is located in the front of the unit, leaving the less possible untreated surface and reaching close to the edge of the surface. Changeable cutting tools can be adjusted, such as chisels, cutting stars, brushes & diamond cutters, depending on the application use.

ProGrind 250 scarifiers have an adjustable height regulator, changing the cutting depth.



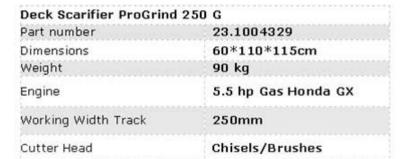

Deck Scarifier ProGrind	250 E4
Part number	23.1004327
Dimensions	60*110*115cm
Weight	90 kg
Motor / Engine	4 hp electric motor
Electric	220 volt
Working Width Track	250 mm
Cutter Head	Chisels/Brushes

Deck Scarifier ProGrind	250 E5
Part number	23.1004328
Dimensions	60*110*115cm
Weight	90 kg
Motor / Engine	5.5 hp electric motor
Electric	380 volt / 50hz - 3 phase
	440 volt / 60hz - 3 phase
Working Width Track	250 mm
Cutter Head	Chisels/Brushes

Deck Scarifier ProGrind	120 E
Part number	23.1004330
Dimensions	36*75*93 cm
Weight	49 kg
Motor	2 hp electric motor
Electric	220 volt
Working Width Track	120mm
Cutter Head	Chisels





Think different. Think strong!

www.vezos.co.uk